

# L10C

## HIGH POWER LED LIGHT

*High Power LED Light Source  
Dimming Brightness 30 steps / Attacable Battery  
Connecting External Power / Support variety of Accessories  
Wireless Control (with optional Product)*



# System

## High Power HD Light


With high power LEDs, the cineroid L10C can offer bright illumination by producing a powerful light beam.



Per chip contains 3 LEDs

## Compact Figure

The small size, lightweight convenient to carry anywhere and anytime is easy to utilize. (92 x 82 x 23(mm) / 160 g)

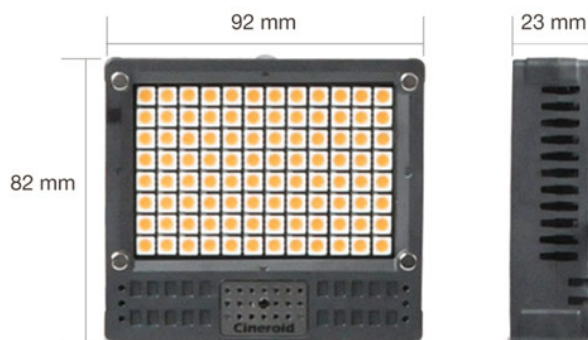

## Dimming Brightness 30 Steps

Turn the brightness dial side to side to adjust the brightness. The brightness range is from 0~30 and the current level is displayed on the Back side.



## Wide range of Power Source

In addition to the rechargeable battery, external power sources can also be used to power the light. 12V, 2A power is recommended for external power.



With NPF Type Battery



Connecting External Power

## Wireless Control

You can adjust the brightness of the LED Light by using a wireless controller. You can set the channel by the buttons behind body. Controller is optional product.



# Specification

## Common

Size	93 x 83 x 25mm
Power input	6~17 V
Light angle	120 degree
Brightness step	30 steps
Mount	1/4" Screw mount
External power	D-tap cable(optional)
Weight	160 g (without Battery)
Display info.	Brightness, Channel, Error warning

## L10C-5K

Photometric	380 Lux / 1m
Color Temp	5400°K
Power drain	18.4W at 2555mA(7.2V)

## L10C-3K

Photometric	325 Lux / 1m
Color Temp	3000°K
Power drain	18.1W at 2520mA(7.2V)


## Part of names



# Package Contents



A. Main Body

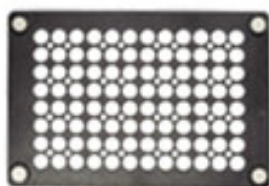

B. Honey Comb



C. Battery mount



D. Mini Ball Head



E. Manual

